

NEW


MPT Series

1.4" 45 MEGAPIXEL FIXED FOCAL LENS




Model No.	Format	Focal Length	F No.	Working Distance	Weight
F1228-MPT	1.4"	12mm	F2.8	0.15m - Inf.	205g
F1628-MPT		16mm	F2.8	0.15m - Inf.	187g
F2524-MPT		25mm	F2.4	0.15m - Inf.	152g
F3526-MPT		35mm	F2.6	0.15m - Inf.	122g
F5026-MPT		50mm	F2.6	0.25m - Inf.	151g


F1228-MPT

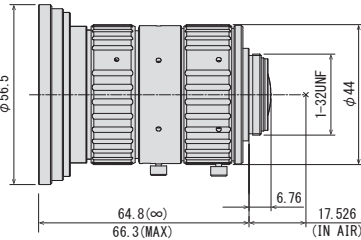

F1628-MPT

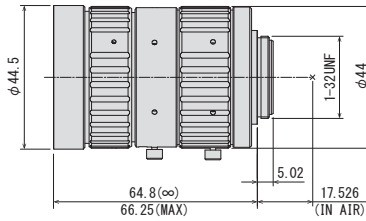

F2524-MPT

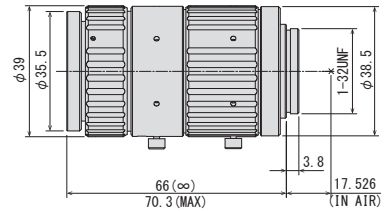

Focal Length	12mm					16mm					25mm								
Max. Aperture Ratio	1:2.8					1:2.8					1:2.4								
Image Circle Diameter	19.08mm × 13.03mm (φ 23.1mm)					19.08mm × 13.03mm (φ 23.1mm)					19.08mm × 13.03mm (φ 23.1mm)								
Operation Range	Iris	F2.8 - F16.0				Iris	F2.8 - F16.0				Iris	F2.4 - F16.0							
	Focus	0.15m - Inf.				Focus	0.15m - Inf.				Focus	0.15m - Inf.							
Control	Iris	Manual				Iris	Manual				Iris	Manual							
	Focus	Manual				Focus	Manual				Focus	Manual							
Angle of View	D	1.4"	86.1°	1.2"	76.6°	1.1"	71.6°	1.4"	70.1°	1.2"	61.0°	1.1"	56.5°	1.4"	49.6°	1.2"	42.4°	1.1"	39.0°
	H	1.4"	76.0°	1.2"	61.9°	1.1"	60.4°	1.4"	60.4°	1.2"	48.1°	1.1"	46.9°	1.4"	41.9°	1.2"	32.7°	1.1"	31.8°
	V	1.4"	56.2°	1.2"	54.8°	1.1"	46.1°	1.4"	43.4°	1.2"	42.2°	1.1"	35.2°	1.4"	29.3°	1.2"	28.5°	1.1"	23.6°
Operating Temperature	-10°C ~ +50°C					-10°C ~ +50°C					-10°C ~ +50°C								
Optical Distortion	1.4"	0.13	1.2"	-0.98	1.1"	-1.23	1.4"	0.06	1.2"	-0.43	1.1"	-0.54	1.4"	0.06	1.2"	-0.34	1.1"	-0.39	
Back Focal Length	10.8mm					12.7mm					18.1mm								
Flange Back Length	17.526mm					17.526mm					17.526mm								
Mount	C-Mount					C-Mount					C-Mount								
Filter Size	M72 P=0.75mm*					M52 P=0.75mm*					M34 P=0.5mm								
Dimensions	φ56.5mm × 64.8mm					φ44.5mm × 64.8mm					φ39mm × 66mm								
	φ75mm × 66.1mm (with TM-1243)					φ54mm × 66.4mm (with TM-1643)													
Weight	205g					187g					152g								

*When using filters, lens requires TM-1243(for 12mm)/TM-1643(for 16mm) (sold separately.) For more detail, please refer to P.36.

- Ultra-high-resolution lens, suitable for 1.4" 45-megapixel sensor
- Enlarged image circle up to Ø23.1mm (1.4" sensor)
- The most compact, lightweight lens design on the machine vision market
- The newest optical design achieves much higher relative illuminance compared to conventional models despite a large format 1.4" sensor (Ø23.1mm)
- The floating design achieves an ultra-high-resolution from near focus to infinity
- Vibration resistance up to 5G


1.4"

45MP


MANUAL

FIX


FLOATING

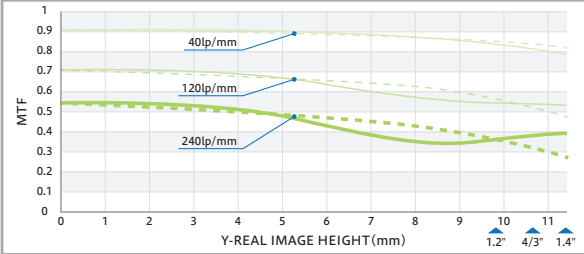

F3526-MPT

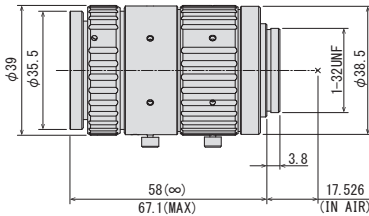

F5026-MPT

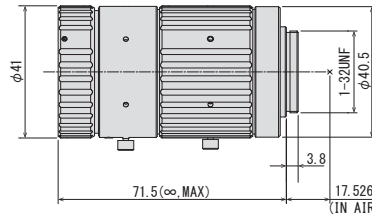

Focal Length	35mm					50mm							
Max. Aperture Ratio	1:2.6					1:2.6							
Image Circle Diameter	19.08mm × 13.03mm (φ 23.1mm)					19.08mm × 13.03mm (φ 23.1mm)							
Operation Range	Iris	F2.6 - F16.0					F2.6 - F16.0						
	Focus	0.15m - Inf.					0.25m - Inf.						
Control	Iris	Manual					Manual						
	Focus	Manual					Manual						
Angle of View	D	1.4"	36.6°	1.2"	30.9°	1.1"	28.3°	1.4"	26.1°	1.2"	21.9°	1.1"	20.0°
	H	1.4"	30.6°	1.2"	23.6°	1.1"	23.0°	1.4"	21.7°	1.2"	16.7°	1.1"	16.2°
	V	1.4"	21.1°	1.2"	20.5°	1.1"	16.9°	1.4"	14.9°	1.2"	14.4°	1.1"	11.9°
Operating Temperature	-10°C ~ +50°C					-10°C ~ +50°C							
Optical Distortion	1.4"	0.01	1.2"	-0.05	1.1"	-0.06	1.4"	-0.02	1.2"	-0.03	1.1"	-0.03	
Back Focal Length	23.1mm					14.2mm							
Flange Back Length	17.526mm					17.526mm							
Mount	C-Mount					C-Mount							
Filter Size	M34 P=0.5mm					M30.5 P=0.5mm							
Dimensions	φ39mm × 58mm					φ41mm × 71.5mm							
Weight	122g					151g							

MPT Series

F1228-MPT (f=12mm)

Working Distance (mm)	Optical Magnification	Extension Ring (mm)	Field of View (mm)					
			14"		12"		1"	
			H	V	H	V	H	V
1000	0.012	-	1582.7	1081.4	1213.1	1047.7	1178.8	858.7
900	0.014	-	1426.7	974.6	1093.4	944.3	1062.4	773.9
800	0.015	-	1270.8	867.9	973.7	840.9	946.1	689.1
700	0.017	-	1114.8	761.1	854.0	737.4	829.8	604.3
600	0.020	-	958.8	654.4	734.3	634.0	713.4	519.5
500	0.024	-	802.9	547.6	614.6	530.6	597.1	434.7
450	0.027	-	724.9	494.3	554.7	478.9	538.9	392.3
400	0.030	-	646.9	440.9	494.8	427.1	480.8	349.9
350	0.034	-	568.9	387.5	435.0	375.4	422.6	307.5
300	0.040	-	490.9	334.1	375.1	323.7	364.4	265.1
250	0.047	-	412.8	280.7	315.2	272.0	306.2	222.7
200	0.058	-	334.8	227.3	255.3	220.2	248.0	180.3
150	0.076	-	256.7	173.9	195.4	168.5	189.8	137.8
100	0.109	0.4	180.7	121.2	137.7	118.3	133.8	97.1

F1628-MPT (f=16mm)

Working Distance (mm)	Optical Magnification	Extension Ring (mm)	Field of View (mm)					
			14"		12"		1"	
			H	V	H	V	H	V
1000	0.016	-	1183.6	808.5	906.4	783.5	880.9	643.1
900	0.018	-	1067.2	729.0	817.2	706.4	794.2	579.8
800	0.020	-	950.9	649.4	728.1	629.3	707.5	516.5
700	0.023	-	834.5	569.8	638.9	552.2	620.9	453.2
600	0.027	-	718.1	490.3	549.7	475.1	534.2	389.9
500	0.032	-	601.8	410.7	460.5	398.0	447.5	326.7
450	0.035	-	543.6	371.0	416.0	359.5	404.2	295.0
400	0.040	-	485.4	331.2	371.4	320.9	360.9	263.4
350	0.045	-	427.2	291.4	326.8	282.4	317.5	231.7
300	0.052	-	369.0	251.6	282.2	243.8	274.2	200.1
250	0.062	-	310.8	211.8	237.6	205.3	230.9	168.4
200	0.076	-	252.6	172.1	193.0	166.7	187.5	136.8
150	0.099	-	194.4	132.3	148.4	128.2	144.2	105.1
100	0.141	0.7	136.6	92.2	104.5	90.0	101.6	74.1

F2524-MPT (f=25mm)

Working Distance (mm)	Optical Magnification	Extension Ring (mm)	Field of View (mm)					
			14"		12"		1"	
			H	V	H	V	H	V
1000	0.025	-	771.4	526.8	590.5	510.6	573.9	419.3
900	0.028	-	694.9	474.5	531.9	459.9	516.9	377.7
800	0.031	-	618.3	422.2	473.3	409.2	460.0	336.1
700	0.035	-	541.7	369.9	414.7	358.5	403.0	294.4
600	0.041	-	465.1	317.6	356.0	307.9	346.0	252.8
500	0.049	-	388.5	265.3	297.4	257.2	289.1	211.2
450	0.055	-	350.2	239.2	268.1	231.8	260.6	190.4
400	0.061	-	312.0	213.1	238.8	206.5	232.1	169.6
350	0.070	-	273.7	186.9	209.5	181.1	203.6	148.8
300	0.081	-	235.4	160.8	180.2	155.8	175.1	128.0
250	0.097	-	197.1	134.6	150.9	130.5	146.6	107.2
200	0.121	-	158.8	108.5	121.6	105.1	118.1	86.3
150	0.159	-	120.5	82.3	92.3	79.8	89.7	65.5
100	0.235	1.8	80.9	55.0	62.2	53.7	60.5	44.3

MPY Series

F3526-MPT (f=35mm)

Working Distance (mm)	Optical Magnification	Extension Ring (mm)	Field of View (mm)					
			14"		12"		1"	
			H	V	H	V	H	V
1000	0.035	-	540.3	369.0	413.5	357.6	401.8	293.9
900	0.039	-	485.7	331.7	371.7	321.5	361.3	264.2
800	0.044	-	431.1	294.5	330.0	285.4	320.7	234.5
700	0.051	-	376.6	257.2	288.2	249.3	280.1	204.9
600	0.059	-	322.0	219.9	246.5	213.2	239.5	175.2
500	0.071	-	267.5	182.7	204.7	177.1	199.0	145.5
450	0.080	-	240.2	164.1	183.8	159.0	178.7	130.7
400	0.090	-	212.9	145.4	163.0	141.0	158.4	115.8
350	0.103	-	185.6	126.8	142.1	122.9	138.1	101.0
300	0.121	-	158.3	108.2	121.2	104.9	117.8	86.2
250	0.146	-	131.1	89.5	100.3	86.8	97.5	71.3
200	0.184	-	103.8	70.9	79.5	68.7	77.2	56.5
150	0.249	-	76.5	52.3	58.6	50.7	56.9	41.7
100	0.387	2.6	49.3	33.7	37.7	32.7	36.7	26.9

F5026-MPT (f=50mm)

Working Distance (mm)	Optical Magnification	Extension Ring (mm)	Field of View (mm)					
			14"		12"		1"	
			H	V	H	V	H	V
1000	0.052	-	369.2	252.1	282.5	244.4	274.6	200.8
900	0.058	-	331.0	226.0	253.3	219.1	246.2	180.1
800	0.065	-	292.8	200.0	224.1	193.8	217.8	159.3
700	0.075	-	254.6	173.9	194.9	168.6	189.4	138.5
600	0.088	-	216.4	147.8	165.6	143.3	161.0	117.8
500	0.107	-	178.3	121.8	136.4	118.0	132.6	97.0
450	0.120	-	159.2	108.7	121.8	105.4	118.4	86.6
400	0.136	-	140.1	95.7	107.2	92.7	104.2	76.2
350	0.158	-	121.0	82.6	92.6	80.1	90.0	65.8
300	0.187	-	101.9	69.6	78.0	67.5	75.8	55.5
250	0.230	-	82.8	56.6	63.4	54.8	61.6	45.1
200	0.299	3.50	63.2	42.9	48.6	34.6	47.3	34.6
150	0.433	10.00	43.8	29.8	33.8	24.1	32.8	24.1
100	0.773	26.50	24.6	16.7	18.9	13.5	18.4	13.5

V0828-MPY2 (f=8mm)

Working Distance (mm)	Optical Magnification	Extension Ring (mm)	Field of View (mm)					
			1"		1"		2/3"	
			H	V	H	V	H	V
1000	0.008	-	1790.8	1310.2	1617.6	1206.7	1103.1	820.5
900	0.009	-	1614.2	1180.9	1458.0	1087.5	994.2	739.5
800	0.010	-	1437.5	1051.4	1298.3	968.3	885.2	658.4
700	0.012	-	1260.1	921.4	1137.9	848.5	775.7	576.9
600	0.014	-	1083.5	792.0	978.3	729.3	666.7	495.9
500	0.016	-	906.4	662.2	818.2	609.8	557.4	414.6
450	0.018	-	817.8	597.3	738.1	550.0	502.8	373.9
400	0.020	-	729.5	532.6	658.3	490.4	448.3	333.3
350	0.023	-	641.0	467.7	578.3	430.7	393.6	292.7
300	0.027	-	552.1	402.6	497.9	370.6	338.8	251.9
250	0.032	-	463.7	337.9	418.0	311.0	284.3	211.3
200	0.039	-	375.6	273.3	338.4	251.6	229.9	170.9
150	0.051	0.2	287.1	208.5	258.4	191.9	175.3	130.3
100	0.075	0.2	198.5	143.7	178.4	132.2	120.8	89.7

V1228-MPY2 (f=12mm)

Working Distance (mm)	Optical Magnification	Extension Ring (mm)	Field of View (mm)					
			1"		1"		2/3"	
			H	V	H	V	H	V
1000	0.012	-	1167.9	854.2	1053.4	787.5	720.9	538.6
900	0.014	-	1051.2	768.8	948.2	708.8	648.9	484.8
800	0.015	-	934.6	683.4	842.9	630.1	576.8	430.9
700	0.018	-	818.0	598.1	737.7	551.5	504.8	377.1
600	0.021	-	701.5	512.9	632.7	472.9	432.9	323.4
500	0.025	-	584.7	427.5	527.3	394.2	360.8	269.6
450	0.027	-	526.5	384.9	474.8	354.9	324.9	242.7
400	0.031	-	468.2	342.3	422.2	315.6	288.9	215.8
350	0.035	-	409.9	299.7	369.6	276.3	252.9	189.0
300	0.041	-	351.6	257.0	317.0	237.0	216.9	162.1
250	0.048	0.5	303.1	221.0	273.0	203.7	186.4	139.2
200	0.060	0.5	242.7	177.0	218.6	163.1	149.3	111.5
150	0.079	0.5	182.5	133.1	164.3	122.6	112.2	83.8
100	0.115	1.0	126.3	91.9	113.6	84.7	77.5	57.8

V1628-MPY2 (f=16mm)

Working Distance (mm)	Optical Magnification	Extension Ring (mm)	Field of View (mm)					
			1"		1"		2/3"	
			H	V	H	V	H	V
1000	0.016	-	890.1	651.4	802.4	601.0	550.7	412.4
900	0.018	-	800.7	586.0	721.8	540.7	495.4	371.0
800	0.020	-	711.5	520.8	641.5	480.5	440.3	329.8
700	0.023	-	622.2	455.4	560.9	420.2	385.0	288.4
600	0.027	-	532.7	390.0	480.3	359.9	329.7	247.0
500	0.032	-	443.4	324.6	399.8	299.6	274.5	205.6
450	0.036	-	398.7	291.9	359.5	269.4	246.9	184.9
400	0.040	-	353.9	259.2	319.2	239.2	219.2	164.2
350	0.046	-	309.3	226.5	278.9	209.1	191.6	143.5
300	0.054	-	264.6	193.8	238.6	178.9	163.9	122.8
250	0.063	1.0	227.8	166.3	205.1	153.3	140.5	105.1
200	0.079	1.0	181.4	132.5	163.4	122.2	111.9	83.8
150	0.106	1.0	135.1	98.8	121.7	91.1	83.5	62.5
100	0.156	2.0	92.1	67.2	82.9	61.9	56.7	42.5

V2528-MPY (f=25mm)

Working Distance (mm)	Optical Magnification	Extension Ring (mm)	Field of View (mm)					
			1"		1"		2/3"	
			H	V	H	V	H	V
1000	0.026	-	555.5	407.0	500.8	375.7	344.4	258.3
900	0.028	-						